

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 0 726 064 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
14.08.1996 Bulletin 1996/33

(51) Int Cl.<sup>6</sup>: A61B 17/70

(21) Application number: 96300411.4

(22) Date of filing: 22.01.1996

(84) Designated Contracting States:  
AT BE CH DE DK ES FR GB GR IE IT LI LU MC NL  
PT SE

• Sherman, Michael C.  
Memphis, Tennessee 38120 (US)

(30) Priority: 25.01.1995 US 377658

(71) Applicant: DANEK MEDICAL, INC.  
Memphis, TN 38132 (US)

(74) Representative: Allman, Peter John et al  
MARKS & CLERK,  
Sussex House,  
83-85 Mosley Street  
Manchester M2 3LG (GB)

(72) Inventors:  
• Gertzbein, Stanley  
Houston, Texas 77027 (US)

### (54) Screw-rod-connector of an anterior spiral fixation device

(57) A transverse fixator assembly for spanning between a number of longitudinal members (11) situated adjacent a patient's vertebrae and methods for fixation of the spine which allow variation of the distance between two or more vertebrae. The assembly includes a number of connectors (15) configured to span the distance between and engage the longitudinal members. The connectors define a thru-hole (16) for engaging a bone bolt (30) which is engaged to a vertebra plus a number of spikes (17) projecting from the connector. A locking mechanism is configured to prevent the bolt from rotating relative to the connector when the nut is being tightened. One or more of the connectors may be a dynamic connector which is slidably engaged to the longitudinal members to vary the distance between the vertebrae for compression or distraction.

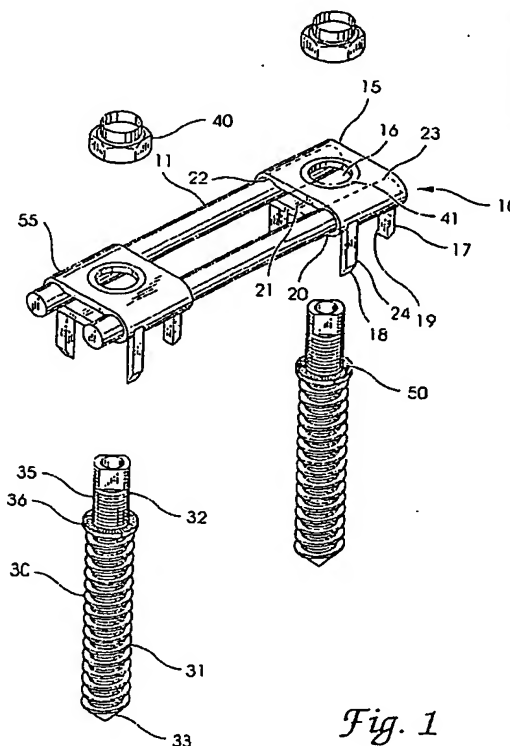


Fig. 1

Best Available Copy

EP 0 726 064 A2

## Description

### FIELD OF THE INVENTION

The present invention broadly concerns devices for use in spinal implant systems, particularly those using spinal rods contoured for connection at various locations along the length of the spinal column. More specifically, the invention concerns an apparatus for spanning between spinal rods to support vertebral fixation elements of the implant system which provide direct engagement to vertebrae of the spinal column. The invention is particularly useful with methods and devices for anterior fixation of the spine.

### BACKGROUND OF THE INVENTION

Spinal fractures often occur at the thoracolumbar junction. Most of these fractures are burst injuries which are particularly dangerous because retropulsed bone fragments can cause spinal cord or caudal equina injuries. Posterior fixation has long been the primary approach for traumatic spinal injuries of this type.

The development of posterior internal fixation procedures for burst fractures was a substantial improvement over early approaches of bed rest and body casts. However, several disadvantages to these procedures were discovered. For example, this approach fails to reduce kyphosis or allow complete clearing of the spinal canal. Other complications include pseudoarthroses, late rod disengagement and inadequate reduction. Also, some posterior instrumentations require the fusion to extend at least two levels above and below the injury, particularly at the thoracolumbar junction. The posterior approach is also limited in the viability for use in burst fractures because in such fractures neural compression generally occurs from the anterior direction. Therefore, it is better to decompress and fuse the spine anteriorly. These difficulties have motivated attempts at anterior approaches. Various anterior and posterior spinal fixation devices and methods are discussed in Howard S. An, et al., (1992) *Spinal Instrumentation*, herein incorporated by reference.

There are several advantages to anterior internal fixation. An anterior approach allows complete clearance from the spinal canal of bone fragments and/or total resection of a tumor. It also permits fusion of a minimal number of motion segments. In spite of these advantages, the use of anterior approaches has been limited by the risk of complications and other disadvantages of current systems.

Several plate and screw systems have been designed for anterior instrumentation of the spinal column. The Syracuse I-Plate (Danek and Synthes) may use rigid or semi-rigid screws in combination with a plate. Distraction or compression of the bone graft is not possible with this system. The CASF Plate marketed by Acromed is designed to be used in a semi-rigid manner. This de-

vice, as well, does not permit compression or distraction of the bone graft and in addition cannot be used in a rigid construct. The Stafix Plating System marketed by Daruma of Taipei, Taiwan, is an anterior thoracolumbar plate designed to address similar indications. This plate incorporates slots and holes as well as permitting quadrilateral placement of screws. The Anterior Thoracolumbar Plating System under development with Danek and Dr. Zdeblick is a slotted plate designed to attach to the anterior lateral aspect of the vertebral body. The plate allows distraction and/or compression through the use of two screws and two bolts.

Several modular spinal instrumentation systems were developed for anterior instrumentation. The Kaneda device is a system which includes a rod coupler distant from the point of attachment to the vertebral bodies. Rods are inserted through holes in the spinal screw heads which are then attached to the superior and inferior vertebral bodies. Normally two screws are placed in each body, therefore two rods are required. These rods are threaded to allow compression and distraction and are connected to form a solid construct at the end of the procedure. The Texas Scottish Rite Hospital System is also a modular spinal system which can be used anteriorly for the management for burst fractures or tumors. This device can be configured much in the same way as the Kaneda device with two screws in the superior and inferior vertebral body, each connected by rods which are in turn connected together. The Dunn device is another anterior spinal fixation device for use in tumor or thoracolumbar burst fractures. This device, similar to Kaneda, involves vertebral body staples, screws positioned in the vertebral body, and two threaded rods connecting a superior and inferior vertebral body to form a rigid construct.

These systems have proved unsatisfactory. Many of these devices such as the Syracuse I-plate and the Casp plate do not allow distraction or compression of a bone graft in fusion cases. Such static systems cannot be used to correct certain disorders such as kyphosis. The systems that do allow distraction and/or compression are often too complicated and involve the use of multiple screws and bolts. The prominent bone screws and rods of some devices increase the danger of vascular injury. Hardware failures, such as screw pull-out, have led to complications, including pseudoarthrosis. Some systems are further limited because they cannot be used in a rigid construct.

It would therefore be desirable to have a low profile, streamlined system with a minimum of separately implanted components to reduce the amount of time required to implant the system, the risk of vascular injury and the problem of irritation to the surrounding soft tissue of the patient.

A need exists for devices for anterior fixation which reduce the risks of anterior fixation by providing a mechanism to prevent hardware failures, such as screw pull-out.

It is desirable to have a spinal fixation system that is readily adapted to provide lateral coupling between spinal rods and multiple stages or segments of the spinal column. Such a system should provide this segmental interconnection without interfering with vertebral areas available for bone grafting to achieve permanent fixation or immobilization of damaged vertebrae.

There is also a need for low profile, streamlined systems which allow variation of the distances between vertebrae, i.e., compression and distraction, without the need for complicated instrumentation and tools.

There is currently no system that addresses each of these features in a single apparatus. The present invention addresses these needs and provides other benefits not previously found in spinal fixation systems of the prior art.

### SUMMARY OF THE INVENTION

In accordance with the invention, an apparatus is provided for spanning between a pair of longitudinal members situated adjacent a patient's vertebrae along the sagittal plane. The assembly includes a number of connectors which are engageable to the longitudinal members via clamping surfaces provided in a slot defined in the connector. Each of the connectors defines a thru-hole for engaging a bone bolt which in turn is engaged to a vertebral body. A fastener clamps the bone bolt to the connector. The assembly also includes a number of fixation spikes projecting from the connector which are configured to engage the vertebrae.

In a specific embodiment of the invention, there is provided a locking mechanism configured to prevent the bolt from rotating relative to the connector and the vertebra when the unit is being tightened. The locking mechanism may include radial splines on the lower surface of the connector and also on a mating face on the bone bolt. In another embodiment, the spinal fixation system includes a dynamic, or movable, rod connector and a fixed rod connector which allows variation of the distances between vertebrae for compression or distraction.

One object of the invention is to provide an apparatus for use in laterally connecting longitudinal members implanted adjacent a patient's vertebral column.

Another object of this invention is to provide an apparatus which provides for convenient management of thoracolumbar burst fractures and tumors and which permits anterior load sharing as well as compression and distraction.

One benefit of the apparatus of the present invention is that it combines means for connecting the vertebral fixation elements to the spinal rods with means for laterally or transversely connecting the spinal rods together. An additional benefit is that the invention provides a more compact construct with a lower profile as compared to prior spinal rod constructs employing many individual components to connect vertebrae and spinal rods.

Yet another benefit achieved by the invention resides in providing segmental coupling or connection of the spinal rods, while permitting a wide variation of orientations at the vertebral fixation elements relative to the spinal rods.

Another advantage of this invention is that it provides fixation assemblies that can be top loaded, or implanted over bolts after the bolts have been engaged in the vertebrae.

Other objects and further benefits of the present invention will become apparent to persons of ordinary skill in the art from the following written description and accompanying figures.

### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an exploded perspective view of the spinal fixation system of the present invention including a pair of transverse connectors spanning between two spinal rods with a pair of vertebral fixation bolts and corresponding nuts.

FIG. 2 is an end elevational view of a transverse connector according to one embodiment.

FIG. 3, is a side cross-sectional view of a transverse connector engaged to a vertebra.

FIG. 4 is a side elevational view of a bone bolt according to one embodiment of the invention for use with the fixation system shown in FIG. 1.

FIG. 5 is a bottom elevational view of the lower surface of a transverse connector shown in FIG. 1.

FIG. 6 is a top elevational view of the bone bolt according to one embodiment as shown in FIG. 2.

### DESCRIPTION OF THE PREFERRED EMBODIMENTS

For the purposes of promoting an understanding of the principles of the invention, reference will now be made to the embodiments illustrated in the drawings and specific language will be used to describe the same. It will nevertheless be understood that no limitation of the scope of the invention is thereby intended, such alterations and further modifications in the illustrated devices, and such further applications of the principles of the invention as illustrated therein being contemplated as would normally occur to one skilled in the art to which the invention relates.

The present invention is useful for anterior internal fixation of the spine which is indicated for thoracolumbar burst fractures with significant canal compromise, vertebral body tumors, lesions due to infection, spondylolisthesis, degenerative discs, and post-laminectomy instability.

This invention provides a top-loaded, low profile anterior fixation system which requires minimal instrumentation yet permits anterior load sharing and compression or distraction. The unique constructs of this invention permit fixation and compression or distraction with only

two bolts, two rods and two rod connectors.

A spinal fixation system 10 in accordance with a preferred embodiment of the present invention is depicted in FIG. 1. The system 10 includes a transverse connector 15 defining a thru-hole 16 and having a lower bone engagement surface 20 and an upper surface 23. The transverse connector 15 engages a number of longitudinal members 11 by clamping surface 22 provided in a slot 21 defined in the connector 15. Preferably the longitudinal members 11 are spinal fixation rods. In one embodiment, the members 11 are smooth shot peened rods.

Referring to FIGS. 1, 2, and 3, a number of fixation spikes 17 are fixedly attached to the lower surface 20 of the connector 15. The lower surface 20 of the connector 15 in combination with an inner surface 19 of the fixation spikes 17 are configured to fit snugly around either side of a vertebra. In another application, the fixation spikes 17 may be slightly embedded into the vertebra. The end of each spike 17 is preferably beveled on its outer surface 24 so that each fixation spike 17 terminates in a wedge shape 18 which may aid in fixing and holding the connector 15 in place over a vertebra.

Bolts 30 are used to attach the system 10 to the vertebrae. It is understood that "bolt" refers to any of various bone fasteners, including a standard bone screw. The present invention is unique because it requires only one bolt per connector. Previous devices have required two. FIG. 4 shows one embodiment of a bolt 30 in detail. The bolt 30 has a vertebra engaging portion 31 at a first end 33 and a post 32 at a second end 35. The vertebra engaging portion 31 of the bolt 30 may be configured, for example, with cancellous threads for fixation in the spongy bone of the vertebral body. The bolt also includes an integral flange 36 for supporting and clamping the connector 15. In one embodiment, the second end 35 is configured to receive a driving tool. The configuration may include an internal or external hex as is well known in the art.

The fixation system 10 can be top-loaded, i.e., implanted over a bolt 30 after the bolt 30 is engaged to a vertebra. This is advantageous because it reduces the required size of the surgical opening and trauma to the patient. Top-loading also provides a mechanical advantage during implantation of the system. After a bolt 30 is engaged to a vertebra by conventional means, the post 32 is insertable through the thru-hole 16 of the connector 15. A fastener 40 is provided for each of the bolts 30. The fastener 40 engages to the post 32 of the bolt 30 to secure the connector 15 to the bolt 30 and to clamp the longitudinal members 11 within the slot 21 of the connector 15. Thus, the longitudinal members 11 and the connector 15 are secured by a single bolt 30. Where the fastener 40 is a threaded nut, as in the preferred embodiment, the post 32 of the bolt 30 may include male threads to engage with the nut. The nut or other fastener 40 is then top-tightened with a tool such as a socket wrench.

The connector 15 may define recesses 41 surrounding each thru-hole 16 defined in the connector 15. Each recess can be configured to accept a fastener 40 in low profile so that the fastener 40 does not extend over the upper surface 23 of the connector 15 when it is engaged to a post 32. The recesses 41 can be concave to accept an arcuate underside of the fastener 40.

The spinal fixation system 10 may also be provided with a locking mechanism configured to prevent the bolts 30 from rotating relative to the connector 15 and the vertebra while the fastener or nut 40 is being tightened onto the bolt 30. The locking mechanism also prevents the bolts from pulling out over time. In one embodiment of the invention, the locking mechanism includes an annular ring 45 defined on the lower surface 20 (FIG. 5) of the connector 15 and a mating face 50 affixed to each bolt 30 at a location between the post 32 and the vertebra engaging portion 31. The annular ring 45 on the lower surface 20 of the connector 15 is concentrically disposed around the thru-hole 16 and includes a number of radial splines 46. Referring to FIGS. 1 and 6, the mating face 50 is concentrically disposed around and affixed to the bolt 30 and includes a number of opposing radial splines 51 for interdigitated engagement with the radial splines 46 on the lower surface 20 of the connector 15. The annular ring 45 may alternately be a washer affixed to or a ring integrally formed on the lower surface 20 of the connector 15.

The clamping surface 22 provided by the slot 21 defined in the connector 15 may include a number of scallops (FIG. 6). The scallops are configured to receive the longitudinal members 11 in a manner that is well known in the art. For example, each scallop can be generally formed at a radius that is slightly smaller than the radius of the longitudinal member 11 which is to be situated within the scallop. The scallops provide means for fixing the spinal rods so that the longitudinal members 11 and connector 15 do not shift relative to each other. However, it is understood that the slot 21 defined in the connector 15 may be smooth and that other means may be provided to firmly fix the longitudinal members 11.

For example, in one embodiment, the slot 21 is smooth and the engagement of the longitudinal members 11 with the connector 15 is secured by a clamping action. The tightening of a fastener 40 on the post 32 causes a narrowing of the slot 21 of the connector 15 which in turn causes the connector 15 to securely clamp the longitudinal members 11.

Another aspect of this invention provides means to vary the distance between vertebral bodies. According to the invention, a dynamic transverse connector 55 (FIG. 1) is slidable along the two longitudinal members 11 for compression and distraction of the vertebral bodies attached to the system 10. One or more of other connectors 15 may be engaged to the longitudinal members at a fixed location. After compression or distraction is achieved, the dynamic connector 55 can be fixed by tightening the bolt 30 to which the connector 55 is fast-

tened. The nuts 40 which attach to the bolts 30 can then be top tightened with a tool such as a socket wrench.

The invention also provides methods for fixing the spine which include drilling a first hole in a first vertebral body and drilling a second hole in a second vertebral body. A bone bolt 30 is engaged to each of the first and second holes. The vertebrae are then supported with a fixation system 10 which includes two longitudinal members 11, such as rods. A first connector 15 is attached to a first end of each of the longitudinal members 11, and a dynamic rod connector 55 is slidably engaged to the longitudinal members 11. One of the bone bolts 30 is engaged to the thru-hole 16 of the first connector 15. The dynamic rod connector 55 is situated so that another bolt 30 engages a thru-hole 16 in the dynamic rod connector 55. The dynamic rod connector 55 is then slid along the longitudinal members 11 to vary the distance between the first and second vertebrae. The post 32 of each bone bolt 30 is then engaged with a nut 40 to secure the fixation system 10 to the vertebrae. The dynamic rod connector 55 may be slid along the longitudinal members 11 in the direction towards the fixed connector 15 to compress the vertebrae before engaging the bone bolts 30 with the nuts 40. The dynamic connector 55 may also be slid in a direction away from the fixed connector for distraction.

The spinal fixation system 10 is preferably formed of medical grade stainless steel or similar high strength material. Other materials are contemplated, provided the material is strong enough to endure the high loads transmitted through the components, and yet are biocompatible. Specifically, the system could be manufactured in 6A14V titanium or 316LVM stainless steel. The system can be provided in several different sizes ranging from, but not limited to, 2.0 inches to 5.5 inches.

While the invention has been illustrated and described in detail and the drawings and foregoing description, the same is to be considered as illustrative and not restrictive in character, it being understood that only the preferred embodiments have been shown and described and that all changes and modifications that come within the spirit of the invention are desired to be protected.

#### Claims

##### 1. A spinal fixation system comprising:

at least two longitudinal members;  
a transverse connector defining a thru-hole and having

a lower bone engagement surface,  
an opposite upper surface, and  
said connector defining a slot to receive  
said members, and a number of internal  
clamping surfaces surrounding said slot,

said clamping surfaces configured to engage said members;

a number of spikes projecting from said lower surface of said connector, said spikes configured to engage a vertebra;  
a bolt having

a vertebra engaging portion on a first end, a post on a second end, said post insertable through said thru-hole of said connector,

an integral flange between said vertebra engaging portion and said post for supporting said connector; and

a fastener engageable to the post of said bolt to secure

the connector to the bolt and to clamp said connector between said fastener and said flange of said bolt.

2. The system of claim 1 wherein the post of said bolt is threaded and the fastener is a threaded nut.

3. The system of claim 1 wherein the second end of said bolt is configured to receive a driving tool for driving the bolt into a vertebra.

4. The system of claim 3 wherein the second end includes an external hex configured to receive a driving tool.

5. The system of claim 3 wherein the second end includes an internal hex configured to receive a driving tool.

6. The system of claim 1 wherein said thru-hole includes a recess defined in the upper surface of said connector and said fastener is sized to be received in a recess without extending above the upper surface.

7. The system of claim 6 wherein said recess is concave and said fastener includes an arcuate underside, said recess configured to accept said fastener.

8. The system of claim 2 further comprising a locking mechanism configured to prevent the bolt from rotating relative to said connector and the vertebra when the threaded nut is being threaded onto said post.

9. The system of claim 8 wherein said locking mechanism includes:

an annular ring defined on the lower surface of said connector and concentrically disposed

around the thru-hole, said annular ring defining a number of radial splines; and a mating face affixed to said flange and concentrically disposed around said post of said bolt, said mating face defining a number of opposing radial splines for interdigitating engagement with the radial splines on said lower surface of said connector.

10. The system of claim 9 wherein the annular ring is integrally formed on the lower surface of said connector. 10
11. The system of claim 9 wherein the annular ring is a washer affixed to the lower surface of said connector. 15
12. The system of claim 1 wherein the clamping surfaces are defined by a number of scallops formed in said slot, said scallops shaped to receive and engage said members therein, said scallops surrounding and clamping a portion of said members after the nut has been tightened on the post of the bolt. 20

13. A spinal fixation system comprising: 25

two parallel rods, each having a first end and a second end;  
 a fixed rod connector having a lower surface and an upper surface and defining a thru-hole, said fixed rod connector fixed to the first end of both of said rods; 30  
 a dynamic rod connector having a lower surface and an upper surface and defining a thru-hole, said dynamic rod connector slidably engaged to each of said rods; 35  
 a number of spikes fixedly projecting from said lower surface of each of said connectors, said spikes configured to engage a vertebra; 40  
 one bolt for each connector, each said bolt having a vertebra engaging portion on a first end and a threaded post on a second end, said post insertable through said thru-holes of said connectors; 45  
 an integral flange between said vertebra engaging portion and said post for supporting said connector; and  
 a threaded nut for each of said bolts, said nut engageable to a bolt to secure a connector to a bolt. 50

14. The system of claim 13 wherein the second end of said bolt is configured to receive a driving tool for driving the bolt into a vertebra. 55
15. The system of claims 13 wherein the second end includes an external hex configured to receive a

driving tool.

16. The system of claim 13 wherein the second end includes an internal hex configured to receive a driving tool.
17. The system of claim 13 wherein each said thru-hole includes recesses defined in the upper surface of said connector and said nut is sized to be received in a recess without extending above the upper surface.
18. The system of claim 17 wherein said recess is concave and said nut includes an arcuate underside, said recess configured to accept said nut.
19. The system of claim 13 further comprising a locking mechanism configured to prevent the bolt from rotating relative to said connector and the vertebra when the nut is being threaded onto said post.
20. The system of claim 19 wherein said locking mechanism includes:

an annular ring defined on the lower surface of said connector and concentrically disposed around the thru-hole, said annular ring defining a number of radial splines; and a mating face affixed to said flange and concentrically disposed around said post of said bolt, said mating face defining a number of opposing radial splines for interdigitating engagement with the radial splines on said lower surface of said connector.

21. The system of claim 20 wherein the annular ring is integrally formed on the lower surface of said connector.
22. The system of claim 10 wherein the annular ring is a washer affixed to the lower surface of said connector.
23. The system of claim 13 wherein the clamping surfaces are defined by a number of scallops formed in said slot, said scallops shaped to receive and engage said members therein, said scallops surrounding and clamping a portion of said members after the nut has been tightened on the post of the bolt.
24. A transverse fixator assembly for spanning between a pair of longitudinal members situated adjacent a patient's vertebrae, comprising:

a number of connectors each having a lower bone engagement surface and an upper surface, each of said connectors configured to

span a distance between said members and engageable to said members, each of said connectors defining a thru-hole for engaging a bone bolt; and  
 a number of spikes projecting from said lower surface of each said connector, said spikes configured to engage a vertebra;  
 a bone bolt for each of said connectors, said bone bolt including,

a vertebra engaging portion on a first end, a threaded post on a second end, said post insertable through said thru-hole of said connector, and  
 an integral flange between said vertebra engaging portion and said post for supporting said connector;  
 a threaded nut for each of said bolts, said nut engageable to a bolt to secure a connector to a bolt; and

a locking mechanism configured to prevent the bolt from rotating relative to said connector and the vertebra when the threaded nut is being threaded onto said post.

25. The system of claim 24 wherein each of said thru-holes includes recesses defined in the upper surface of said connector and said nuts are sized to be received in a recess without extending above the upper surface.

26. The system of claim 24 wherein said locking mechanism includes:

an annular ring defined on the lower surface of said connector and concentrically disposed around the thru-hole, said annular ring including a number of radial splines;  
 a mating face affixed to said flange and concentrically disposed around said post of said bolt, said mating face having a number of opposing radial splines for interdigitating engagement with the radial splines on said lower surface of said connector.

27. The system of claim 26 wherein the annular ring is integrally formed on the lower surface of said connector.

28. The system of claim 26 wherein the annular ring is a washer affixed to the lower surface of said connector.

29. A method for fixation of the spine, comprising:

drilling a first hole in a first vertebral body;  
 drilling a second hole in a second vertebral


body;  
 engaging a first threaded bone bolt through the first hole;  
 engaging a second threaded bone bolt through the second hole;  
 supporting the vertebra with a fixation system, said system including;

two longitudinal members,  
 a fixed rod connector attached to a first end of each of said members, said fixed rod connector defining a first thru-hole, and  
 a dynamic rod connector slidably engaged to said members, said dynamic rod connector defining a second thru-hole;


engaging tire first bolt to the first thru-hole;  
 situating the dynamic rod connector so that the second bolt engages the second thru-hole;  
 sliding the dynamic rod connector along the longitudinal members to vary the distance between the vertebrae; and  
 engaging each of said bone bolts with a threaded nut to secure the fixation system to tire vertebrae.

30. The system of the method claim 29, wherein the sliding of the dynamic rod connector along the members occurs in a direction towards the fixed connector to provide compression.


31. The system of the method of claim 29, wherein the sliding of the dynamic connector along the members occurs in a direction away from the vertebral bodies to provide distraction.

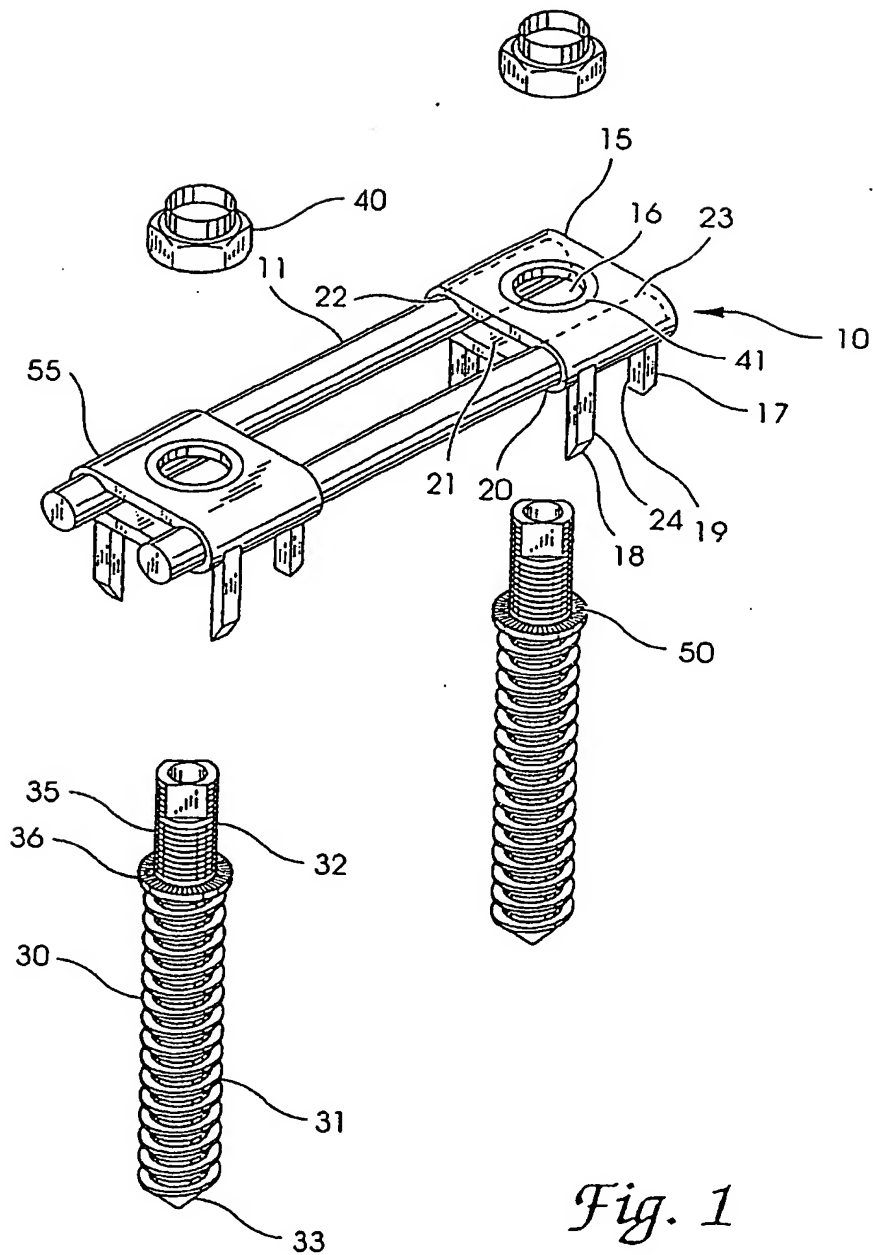




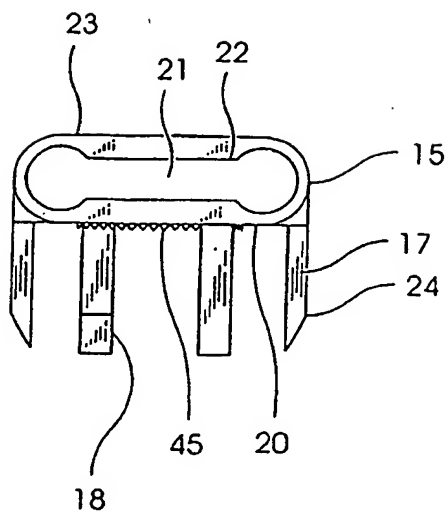


*Fig. 2*

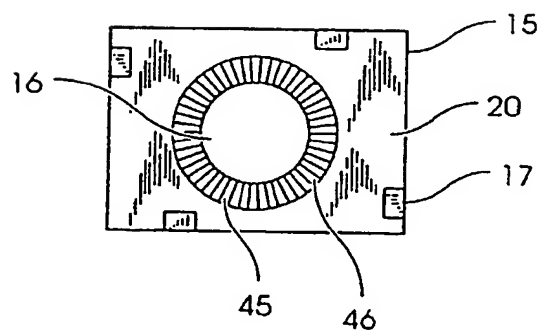


*Fig. 5*

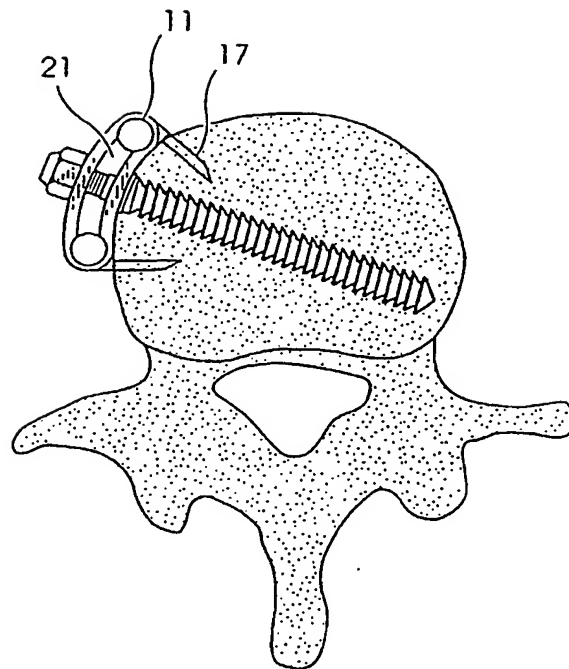

*Fig. 3*

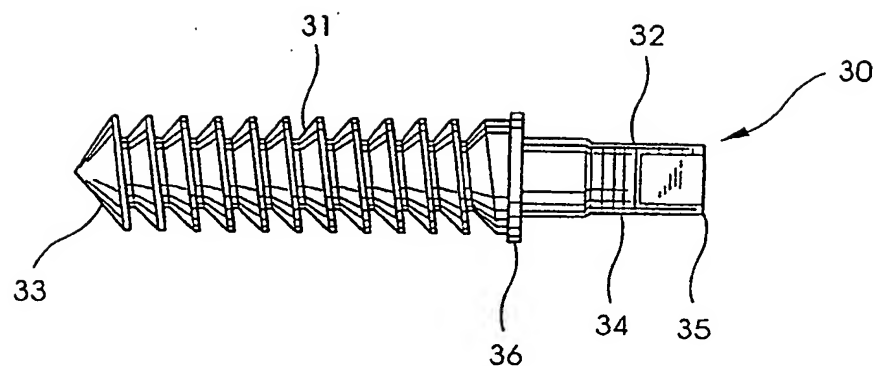

*Fig. 4*



*Fig. 6*

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 0 726 064 A3**

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
28.10.1998 Bulletin 1998/44

(51) Int Cl.<sup>6</sup>: **A61B 17/70, F16B 2/06**

(43) Date of publication A2:  
14.08.1996 Bulletin 1996/33

(21) Application number: **96300411.4**

(22) Date of filing: **22.01.1996**

(84) Designated Contracting States:  
**AT BE CH DE DK ES FR GB GR IE IT LI LU MC NL  
PT SE**

• **Sherman, Michael C.**  
**Memphis, Tennessee 38120 (US)**

(30) Priority: **25.01.1995 US 377658**


(71) Applicant: **DANEK MEDICAL, INC.**  
**Memphis, TN 38132 (US)**

(74) Representative: **Allman, Peter John et al**  
**MARKS & CLERK,**  
**Sussex House,**  
**83-85 Mosley Street**  
**Manchester M2 3LG (GB)**

(72) Inventors:  
• **Gertzbein, Stanley**  
**Houston, Texas 77027 (US)**

### (54) Screw-rod-connector of an anterior spiral fixation device

(57) A transverse fixator assembly for spanning between a number of longitudinal members (11) situated adjacent a patient's vertebrae and methods for fixation of the spine which allow variation of the distance between two or more vertebrae. The assembly includes a number of connectors (15) configured to span the distance between and engage the longitudinal members. The connectors define a thru-hole (16) for engaging a bone bolt (30) which is engaged to a vertebra plus a number of spikes (17) projecting from the connector. A locking mechanism is configured to prevent the bolt from rotating relative to the connector when the nut is being tightened. One or more of the connectors may be a dynamic connector which is slidably engaged to the longitudinal members to vary the distance between the vertebrae for compression or distraction.

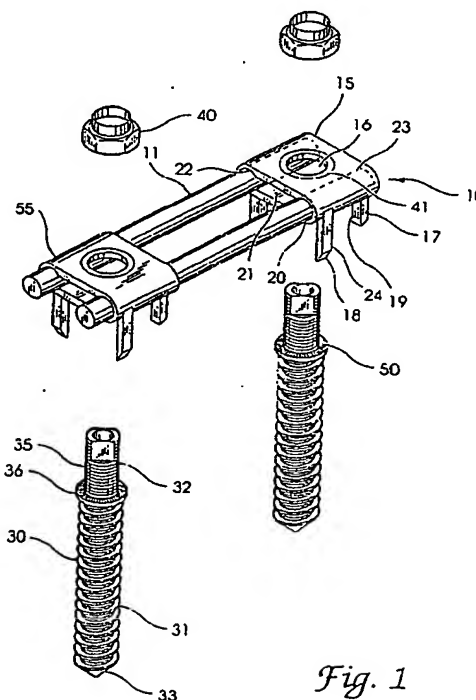

*Fig. 1*

**EP 0 726 064 A3**



European Patent  
Office

# PARTIAL EUROPEAN SEARCH REPORT

Application Number

which under Rule 45 of the European Patent Convention EP 96 30 0411  
shall be considered, for the purposes of subsequent  
proceedings, as the European search report

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
Y	FR 2 704 136 A (FOURNITURES HOSPITALIERES ; LALAIN JEAN JACQUES; SAMANI JACQUES) 28 October 1994 * page 4, line 29 - line 36; figure 1 *	1-28	A61B17/70 F16B2/06
Y	US 5 108 395 A (LAURAIN JEAN-MARIE) 28 April 1992 * page 4, line 7-2; figures 1-3 *	1-28	
A	US 5 330 473 A (HOWLAND ROBERT S) 19 July 1994 * column 6, line 23 - line 51; figure 6 *	9	
A	US 4 611 581 A (STEFFEE ARTHUR D) 16 September 1986 * column 4, line 16-54; figures 6, AND, 11 *	1	
A	US 4 289 123 A (DUNN HAROLD K) 15 September 1981 * column 4, line 6-42; figures 1-4 *	1, 13	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			A61B F16B
INCOMPLETE SEARCH			
<p>The Search Division considers that the present application, or one or more of its claims, does/do not comply with the EPC to such an extent that a meaningful search into the state of the art cannot be carried out, or can only be carried out partially, for these claims.</p> <p>Claims searched completely : 1-28</p> <p>Claims searched incompletely : 29-31</p> <p>Claims not searched :</p> <p>Reason for the limitation of the search:</p> <p>The method claims 28-31 are considered to be a method of surgery since the claimed step of drilling is executed on the human body. Therefore, the claims 28-31 are not patentable according to Article 54 (2) EPC.</p>			
Place of search		Date of completion of the search	Examiner
MUNICH		17 July 1998	Ehram, F
CATEGORY OF CITED DOCUMENTS			
<p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/82 (P04C07)

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**